## NOV 2 MPTB Rec'd PCT/PTO 29 NOV 2006

ICATION PUBLISHED UNDER THE PATENT COPERATION TREATY (PCT) (12) INTERNATIONAL AI

(19) World Intellectual Property Organization International Bureau



## 

(43) International Publication Date 24 February 2005 (24.02.2005)

PCT

## (10) International Publication Number WO 2005/016809 A1

- (51) International Patent Classification7: B62B 1/22
  - B65H 75/24,
- (21) International Application Number:

PCT/NZ2004/000187

- (22) International Filing Date: 16 August 2004 (16.08.2004)
- (25) Filing Language:

English


(26) Publication Language:

English

- (30) Priority Data: 527666 528331
- L5 August 2003 (15.08.2003 18 September 2003 (18.09.2003)
- (71) Applicant and
- (72) Inventor: HUTCHINSON, Vaughan, John [NZ/NZ]: 175 Surrey Road, RD 8, Tariki, Inglewood, Taranaki (NZ).
- (74) Agent: TYRER-HARDING, Deniso; Pipers Central, P.O. Box 19-334, Hamilton (NZ).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, QH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YIJ, ZA, ZM,
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARTPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, BE, ES, FI, FR. GB. GR. HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page |

(54) Title: ADJUSTABLE LEAD, CORD, ROPE OR SHEET STORAGE DEVICE

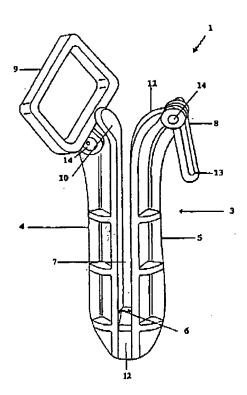

(57) Abstract: A storage device (1) for storing a lead, rope, chain, solid sheet or elongate material, including a body (3) comprising at least one clongate backbone (4) and at least one elongate tine (5) interconnected thereto (12) but separated from hy a defined distance to form a channel (6) adapted to receive a lead, rope, chain, solid sheet or clongate material, support means (9) and a latch apparatus (8), the channel (6) being of a dimension to allow only one length of a lead, rope or chain to fit between the backbone (4) and tine (5) at a time (5), preventing tangling of the lead, rope or chain. The storage device (1) may be attached to a wheeled frame or stand for case of transport.